


LED CCTV Monitor

DESIGNED AND DEVELOPED SPECIFICALLY FOR SECURITY SURVEILLANCE APPLICATIONS ALL PRODUCTS ARE EQUIPPED TO RUN 24 X 7 X 365

- LED Back Light
- Multi Display Function(PIP,PBP,VOV)
- Trigger & Auto Switching Function
- 3D Comb Filter, De-Interlace
- 600 TV Line / 10bits / Digital Conversion Rate
- Remote Control

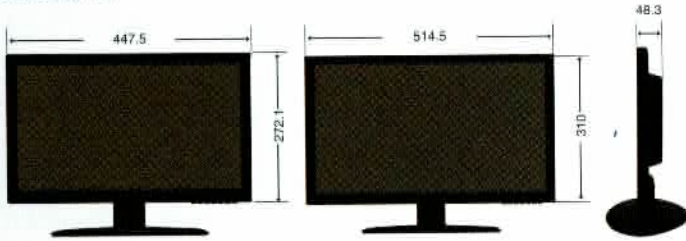

185LEDP



215LEDP



SPECS

185LEDP

215LEDP

Display

Screen Size	18.5"	21.5"
Max. Resolution	1366x768 @60Hz	1920x1080 @60Hz
Pixel Pitch	0.3000mm	0.24825mm
Brightness	250cd/m2	250cd/m2
Contrast Ratio	1000:1	1000:1
Aspect Ratio	16:9	16:9
Viewing Angle (H / V)	170° / 160°	170° / 160°
Color Depth	16.7M	16.7M
Response Time	<5ms	<5ms
Video System	NTSC / PAL	NTSC / PAL
Scanning Frequency(H / V)	30 64KHz / 56~75Hz	30~80KHz / 56~75Hz

Interface

Video In / Out (BNC Jack)	2 / 1	2 / 1
RGB In (15-pin)	1	1
HDMI / DVI In	1 / 1	1 / 1
Trigger In	1	1
Audio In (RCA Type)	1	1
PC stereo In	1	1

Audio

Built-in Speakers	Yes(2Wx2)	Yes (2Wx2)
-------------------	-----------	------------

Transmitter

Remote Control	Yes	Yes
----------------	-----	-----

Special Features

Multi Display Function	PIP/PBP/VOV	PIP/PBP/VOV
Filter Type	3D Comfilter/Deinterlace	3D Comfilter / Deinterlace
Video Resolution(Max)	600 TV line	600 TV line
Camera Mounting Hole	Not Available	Not Available
Rack Mountable Kit	Optional(Wall, Rack, Swing Arm)	
Multi-lingual Language	English, French, German, Italian, Spanish, Danish, Portuguese, Dutch	

Dimension

Outline Dimension	447.5x332.1x182mm	514.5x370.0x182mm
(w/o Stand)	(17.62"x13.08"x7.16")	(20.25"x14.56"x7.16")
Net Weight	3.08Kg(6.790lbs)	3.65Kg(8.046lbs)

Cabinet

Finish / Tilt Stand	Black/Yes
---------------------	-----------

Mounts

VESA Mount Size	100x100mm(BS M4x10mm Screw)
-----------------	-----------------------------

Warranty

Warranty: Parts/Labor	1 Year / 1 Year
MTBF (Approx.)	35K hrs.

Regulations

TUV-NRTL(same as UL), CB, FCC(A), CE-EMC(LVD)

Power

Electrical Ratings	DC12V(AC100~240V(50/60Hz))
Consumption	<36W